


Mode of connection

P1 DVI (24+5) M P2 DVI (24+5) F


Packing:
Delock Polypag Package

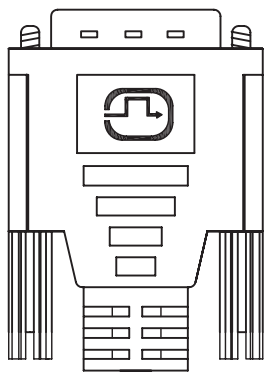

Electrical Testing:
 1. 100% Testing of Open/Short/Intermittent Connectors.
 2. Insulation Resistance: 10M Ω MIN
 3. Contact Resistance: 2 Ω MAX
 4. Hi-Pot: 300V DC 10ms.

Material list

⑦	Ferrite Core	L28.5*OD17.5*ID9.5	2PCS
⑥	INNER MOLD	PE	6g
⑤	OUTER MOLD	Black 45P PVC	18g
④	SCT GW	#4-40UNC 4*47	2PCS
③	plug	DVI(24+5)F Gold Plated Pin Nut	1PCS
②	plug	DVI (24+5)M Gold Plated	1PCS
①	cable	UL20276 30AWG(1P+D+AL+ML)*4+30AWG 1P+30AWG 3C)+F+AL+D+B OD:7.3 Black Marking UL AWM E318900 STYLE 20276 80 ° C 30V VW-1 DVI CABLE	1000mm
NO	NAME	SPEC	Quantity

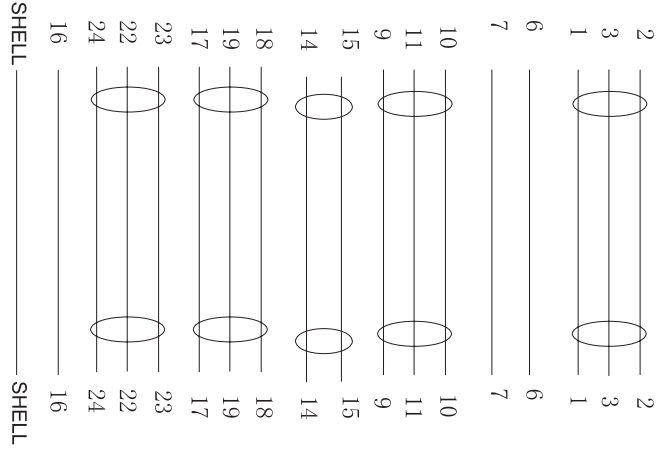

DELCK
we move the world

Item no. **83106**

Barcode: 4043619831067

File: 88093